


Cube speaker

Ultra-Directional Speaker

Cube is the latest generation of ultra-directional speakers, featuring a sleek, all-in-one design that delivers a smooth, harmonious signal within a narrow 15° beam.

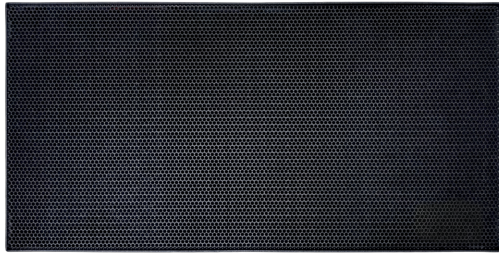

The Best audio quality for a directional speaker

The message delivered by the directional speaker remains clear and intelligible, even in noisy environments. The system helps maintain audience attention for longer and enhances message retention. The physical experience creates an emotional impact, increasing customers' purchase intent. Distortion is minimal, even at high volumes. It offers a listening experience close to that of headphones—but without any physical contact.

Stylish and powerful

Don't hide your speaker anymore. Cube boasts an ultra-sleek, elegant design. Install the directional speaker effortlessly using its VESA mount.

Its powerful sound combined with an extremely narrow beam allows installation up to 10 meters from the listening point.

The Most Directional Speaker on the Market

With a dispersion angle of just 15°, Cube is the most directional speaker system available. This enables you to create highly targeted audio zones, with listening areas approximately every 2 meters. The sound carries up to 15 meters, ensuring a surprising and memorable experience that reinforces message retention.

USE CASES

Retail: Enhance your digital displays with targeted audio.

Museums: Broadcast content without disrupting the overall space.

Public Spaces: Work without interference from messages played at checkouts or entrances.




Interface & Connectivity

- Status LED (voltage)
- Unbalanced stereo audio input via 3.5mm jack (line level)
- Balanced line-level audio input via a 3.5mm Wago terminal block
- 1 input contact on 3.81mm pluggable terminal block
- VESA 100mm mounting

Audio

- Max SPL: 85 dB @ 1m/1KHz
- Directivity (-15dB): <15°
- Frequency Range: 250 Hz–20 KHz
- Input Sensitivity: 0.5Vrms
- GLL file available

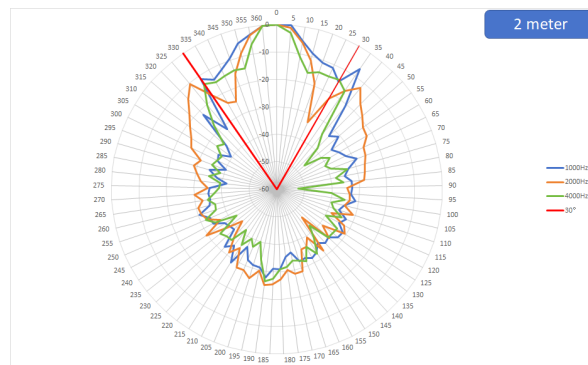

Environmental

- Operating Temperature: -15°C to +45°C
- Operating Humidity: 0–90%
- IP Rating: N/A

Misc.

- Available in black and white
- Power Supply: 24V-2A DC (2.1mm/5.5mm jack)
- VESA 100 compatible
- Dimensions: 150mm (W) x 300mm (L) x 19mm (H)
- Weight: 688g
- CE certified

Accessories

- 24V 2A power supply included
- 1-metre mini-jack to mini-jack cable supplied in the product's colour
- Mounting brackets supplied in the product's colour
- VESA mount supplied in the product's colour